



STRO-22K

20kVA Prime / 22kVA Standby
One Phase / 50Hz / 4 pole

World-Class Alternators

Setting new standards in all aspects from design, manufacturing, material selection and production to testing equipment, tooling and quality control.

Tough: Our alternators are trusted as a component in the production of stationary diesel generator sets, mobile power plants and other power generation equipment which is supplied to various commercial, agricultural, refrigeration, residential, government and military services.

Trusted: Our product is highly regarded for its superior quality and performance. The alternators are used as the main power supply for three major satellite launch bases, for a station in Antarctica and for a spacecraft series.

Tested: Our products are thoroughly tested in different environments to ensure unsurpassed quality and reliability. Our stringent tests verify overall performance and align our products with most internationally-recognised standards.

Standards

- StromerPower alternators meet all key international standards and regulations
- The 4-pole alternator complies with the following major domestic and international standards and regulations: GB755, BS5000, IEC60034, VDE0530, CSAC22.2 100 and NEMA MG-1.22
- It is designed, manufactured and marketed in an ISO 9001 quality assurance environment
- Alternator can be integrated in CE-marked generator set

Electrical Characteristics and Performance

- Class H insulation
- 2/3 pitch winding
- Voltage Range:** 50Hz: 220v - 240v and 380v - 415v (440v)
- High efficiency and motor starting capacity
- Low reactances

Specifications Overview

One Phase / 50Hz / 400V / PF = 0.8			
Continuous		Standby	
kw	kVA	kw	kVA
20	22	22	24

Rated Frequency	Voltage	Voltage Regulation	Voltage Regulation Change	Phase Change Rate	Power Factor
Hz	v	v	% UN	%	
50	400	1%	5%	+/- 1	1

Insulation Class	Type	Phase and Connection	
H	IM B35	One Phase	4 Pole

AVR Model	Stator	Rotor
SX460F	2/3 Pitch	Single Bearing



Mechanical Construction

- StromerPower enclosures are IP23
- All rotors are dynamically balanced in strict accordance with the requirements of the ISO1940 standard
- Robust flanges and shields
- The large junction box makes wiring and adjustment of the AVR easier
- Space for current transformers or other optional modules to be installed
- Compact design and sturdy assembly to withstand generator vibrations
- All our alternators use long-term sealed bearings
- Steel base


Excitation System Regulations

- Self-Excitation Standard**
- Parallel Use:** When the appropriate modules (AVR, current transformer and control equipment) are installed, all 4-pole alternators can be used in parallel
- Bearing Capacity:** NEMA specifications
- Waveform:** According to the IEC standard, the total harmonic distortion rate is less than 5% under

no-load or non-linear load. The telephone interference factor (TIF) is less than 50 in accordance with NEMA specifications

- Frequency:** To be used at a frequency of 50Hz (standard windings) (No. B31, B32)
- Power Factor:** The alternator is designed for loads with a power factor of 0.8

Single-Bearing Outline Schematic

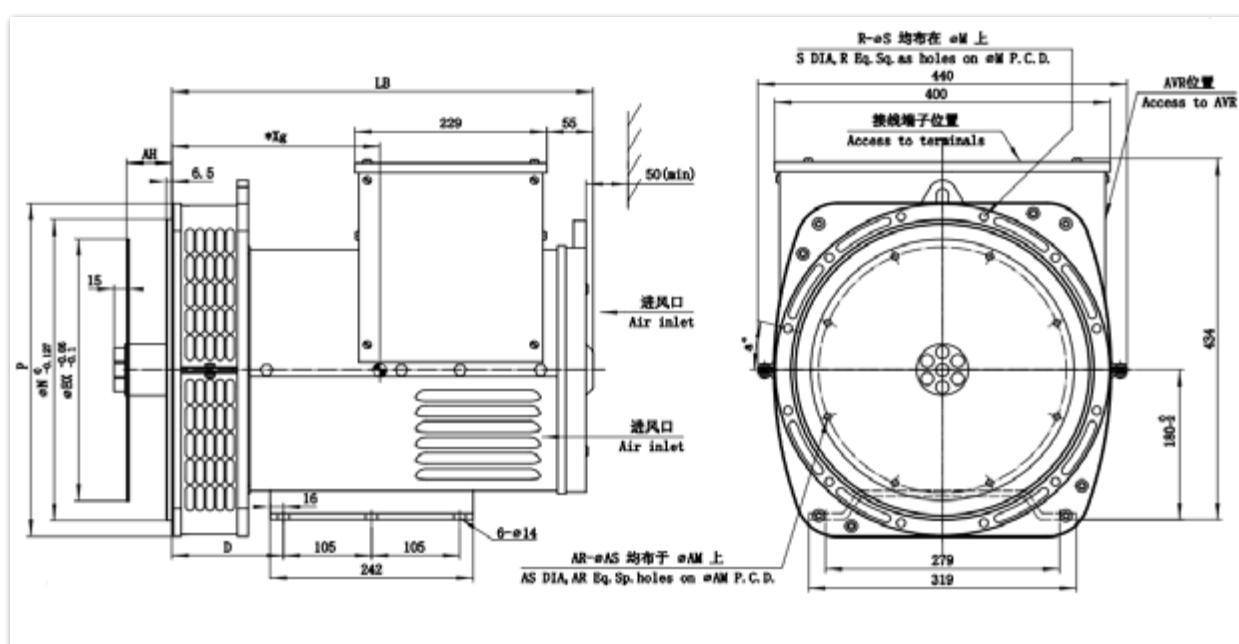

SAE Rating

Model	LB		LC	Xg	Weight
	SAE	BX			
STRO-22K	469	241.3	229	192	119


Adapter

SAE	BX	AM	AR - øAS	AH
mm				
7.5	241.3	222.25	8 - ø9	30.2

Flange

SAE	P	N	M	R - øS	W	D	a°
	mm						
4	400	361.95	381	12 - ø11	5	133	15

Torsional Analysis Data

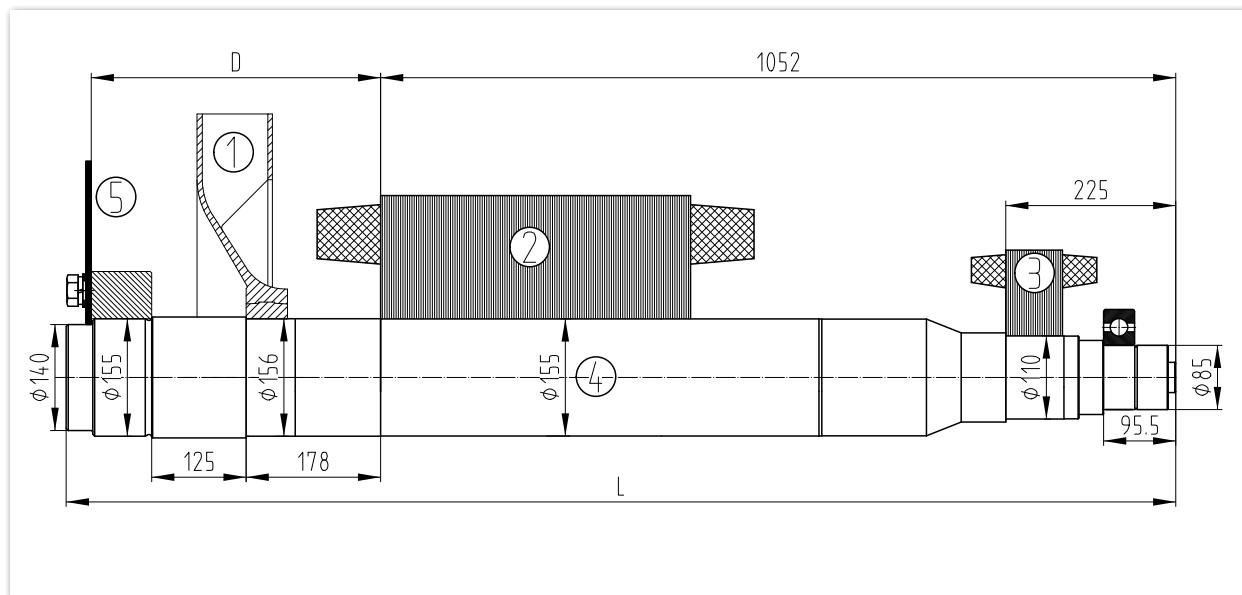

Fan		Main Rotor		Excitation Rotor		Shaft		Total	
Weight (kg)	J(kgm ²)	Weight (kg)	J(kgm ²)	Weight (kg)	J(kgm ²)	Weight (kg)	J(kgm ²)	Weight (kg)	J(kgm ²)
0.652	0.00756	40.3	0.185	6.7	0.0197	1.07	0.0034	56.552	0.21566

SAE	5	Shafts Coupling Flex Plate		
	D	L	Weight (kg)	J(kgm ²)
4/7.5	133	469	1.1	0.0078

Dimensions

Unpacked				Packed			
Length	Width	Height	Net Weight	Length	Width	Height	Net Weight
mm		kg		mm		kg	
515	440	434	124	600	520	600	145

STROMER
POWER

© StromerPower 2025

The information contained in this brochure is for guidance only and does not form part of any contract.

The accuracy cannot be guaranteed as StromerPower have an ongoing process of development and reserve the right to change the specification of their products without notice.

